

FLOMAX[®] 10/15 PUMPS

DESIGNED FOR SMALL ENGINES



- Mounts To 5.5 HP And 6.5 HP Gasoline Engines (3/4" Shaft)
- Available As Pumpak Or Close Coupled To Engine
- Maximizes Flows To Lower HP Ranges




We don't just go with the flow, we create it![™]




34800 BENNETT • FRASER, MI 48026-1686
(586) 293-8240 • FAX (586) 293-8469
(800) 563-8006 • www.mppumps.com

FLOMAX® 10/15 Pump

FLOMAX 15 3600 RPM

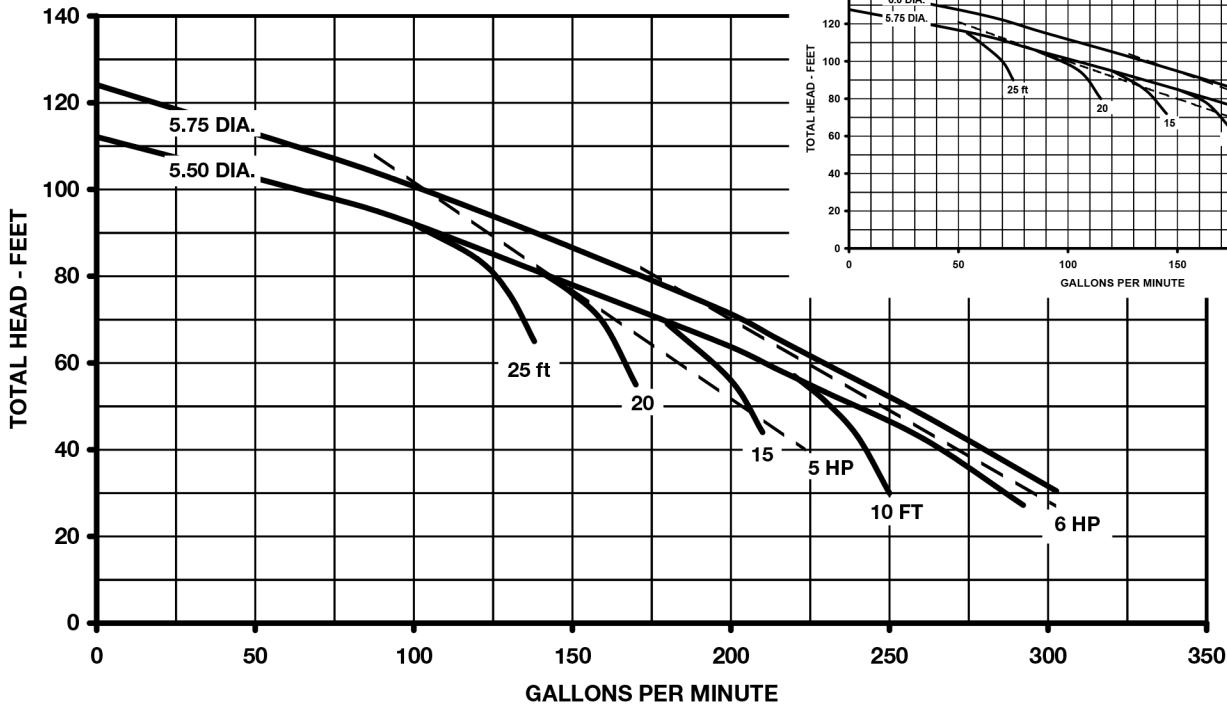

FLOMAX 10 3600 RPM

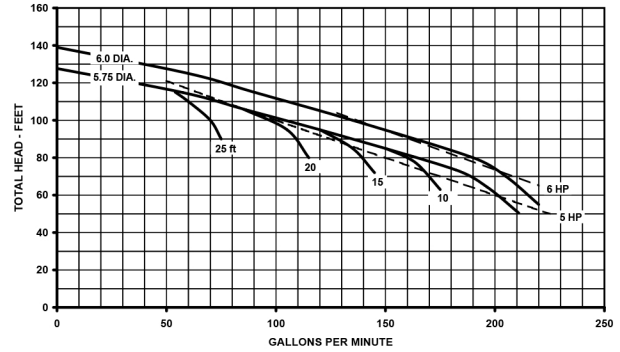

FLOMAX® 10/15 PUMP FEATURES

- Flows Up To 300 gpm
- Head Pressures Up To 140 ft.
- Volute Material: Cast Iron
- Adapter Material: Cast Iron
- Impeller Material: Cast Iron
- Shaft Sleeve: Stainless Steel
- Fasteners: Stainless Steel
- Mechanical Seal: Viton, Standard
Optional Seals Available

Available Close Coupled To **VAL-U-DRIVE** Gasoline Engines



Part No.	Description
FLOMAX 10	
36975	FM10PMP C:ENG 5.5 HP, 5.75 IMP. DIA.
36974	FM10PMP C:ENG 6.5 HP, 6.0 IMP. DIA.
FLOMAX 15	
36952	FM15PMP C:ENG 5.5 HP, 5.5 IMP. DIA.
36951	FM15PMP C:ENG 6.5 HP, 5.75 IMP. DIA.

Call Your Local Distributor
For Cost Comparisons



34800 BENNETT • FRASER, MI 48026-1686
(586) 293-8240 • FAX (586) 293-8469
(800) 563-8006 • www.mppumps.com